

Specifications


SMART Board™ interactive whiteboard system

Model SBX885i4

Physical specifications

SMART Board™ X885 interactive whiteboard

Size	78 1/2" W × 51 1/8" H × 6 1/2" D (199.4 cm × 129.9 cm × 16.5 cm)
Active screen area (maximum interactive, projected image)	74" W × 46 1/4" H (188 cm × 117.5 cm) 87" (221 cm) diagonal 16:10 aspect ratio
Weight	60 lb. (27.2 kg)
Shipping size	87 3/4" W × 56 1/8" H × 4 3/8" D (222.9 cm × 142.6 cm × 11.1 cm)
Shipping weight	90 lb. (40.8 kg)

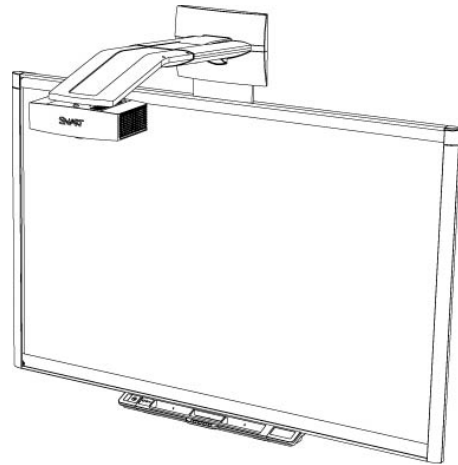

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg).

SMART UF65w projector system

Projector with boom	18 1/2" W × 15 1/2" H × 50 1/4" D (47 cm × 39.4 cm × 127.6 cm)
Remote control	1 5/8" W × 3 3/8" H × 1/4" D (4.1 cm × 8.6 cm × 0.6 cm)
Weight	13 lb. 8 oz. (6.1 kg)
Shipping size (projector box)	18 1/2" W × 15 1/4" H × 8 5/16" D (47 cm × 38.7 cm × 21.1 cm)
Shipping weight (projector box)	11 lb. (5 kg)
Shipping size (boom box)	39 3/4" W × 9 1/2" H × 16" D (101 cm × 24.1 cm × 40.6 cm)

SPECIFICATIONS

SMART Board interactive whiteboard system – Model SBX885i4

Shipping weight (boom box) 24 lb. 4 oz. (11 kg)

Extended Control Panel (ECP)

Size 6 5/8" W × 2 1/8" H × 4 5/8" D (16.8 cm × 5.5 cm × 11.9 cm)
Shipping size 16 1/2" W × 14" H × 3" D (41.9 cm × 35.6 cm × 7.6 cm)
Shipping weight 5 lb. 11 oz. (2.6 kg)

Standard features

System requirements	Windows® operating systems or Mac operating system software as detailed in smarttech.com/kb/126571 .
Software	Two software CDs are included with your interactive whiteboard: SMART Product Drivers and SMART Notebook™ collaborative learning software. Software upgrades are available from smarttech.com/software .
Environmental compliance	China EIP, EU WEEE, CPSIA, US CPSIA, Packaging, Batteries and EU RoHS
Regulatory certification	CSA (U.S./Canada), CB, CE, FCC and C-Tick
Warranty	The projector and ECP have a three-year limited equipment warranty. The SMART UF65w projector lamp has a 1000 hour/one-year warranty. Your interactive whiteboard has a two-year limited equipment warranty or a five-year limited equipment warranty upon registration. See warranty documents for details.
Power consumption	262 W when operating, 3.3 W in Standby mode
Cables	Includes the necessary cables to connect the projector to the ECP. However, you must supply the appropriate input cables for your devices.

Interactive whiteboard features

Touch and gestures	Perform mouse functions with your finger, and write and erase digital ink with a pen tray pen or the eraser. The Object Awareness feature enables you to pick up a pen, and then write, select or erase without replacing the pen. This interactive whiteboard also features gesture capability, providing a natural and flexible way to interact with content.
Dual sketch capabilities	Enables two users to draw simultaneously on the interactive whiteboard surface.

SPECIFICATIONS

SMART Board interactive whiteboard system – Model SBX885i4

Pen tray	Removable end caps for optional accessories. Optical sensors in the pen tray detect when a pen or eraser is lifted from the tray. Color buttons on the pen tray enable you to select pen color.
Pens and eraser	Two ergonomic pens with a comfort grip and a rectangular eraser
Resolution	Touch resolution is approximately 4000 × 4000.
Screen surface	The hard-coated steel surface is durable, optimized for projection, compatible with dry-erase markers and easily cleaned.
Digitizing technology	Four camera DVIT™ (Digital Vision Touch) technology.
Frame finish	Two-tone gray. (Dark gray approximates Pantone® Charcoal Gray 18-0601 TPX. Light gray approximates Pantone Cool Grey 6C.)
Wall-mount bracket	Includes two 32" (81.3 cm) wide brackets, 10 screws and 10 drywall anchors to support your wall-mounted interactive whiteboard
Computer connection	16' (5 m) USB 2.0 cable
Power requirements	The pen tray obtains power from the projector.
SMART UF65w projector system features	
System components	SMART UF65w projector, boom mount with a limit strap (including a controlled-collapse feature), ECP, remote control and all necessary input cables from the ECP to the projector
Image adjustment	The mounting boom includes three mechanical adjustments for aligning the projector image with your interactive whiteboard. The projector also has a focus lever and a digital on-screen menu for brightness, contrast and other image attributes.
Display type	Native resolution WXGA 1280 × 800 projector
Display technology	The projection engine uses DLP® technology by Texas Instruments™, providing Brilliant Color™ performance and quality Gamma 2.2 correction with Bright Room, Dark Room, sRGB, User and SMART Presentation modes, and a six-segment color wheel.
3D technology	3D-ready projector using DLP Link™ technology
Brightness	Estimated at 2000 lumens (typical) at a CCT of 6500 K by the IEC method
Lamp life	3000 hours (Standard 200 W mode) or 5000 hours (Economy 160 W mode)
Aspect ratio	Native 16:10 aspect ratio, with support for 4:3, 16:9 and 5:4 aspect ratios
Contrast ratio	2000:1
Video system compatibility	NTSC, NTSC 4.43, PAL, PAL-N, PAL-M, SECAM

SPECIFICATIONS

SMART Board interactive whiteboard system – Model SBX885i4

- Video interface compatibility** Composite, S-video, and VESA RGB, with additional interface support for Component YPbPr and Component YCbCr inputs with the proper adapters (not included)
- Video format compatibility** Native 16:10 aspect ratio XGA projector resolution. With scaling, supports VGA, SVGA, SXGA, Quad VGA, SXGA+ and UXGA formats.
- Synchronization** Auto image synchronization (auto tracking, frequency, position adjustment, source detect and phase detect)

Mounting hardware Includes hardware for mounting the SMART UF65w projector on framed and solid walls. Includes a safety tether and limit strap.

Projector mounting template The template ensures simple installation and accurate alignment between the SMART UF65w projector and your SMART Board X885 interactive whiteboard.

Installation instructions The installation instructions for your SMART Board X885i4 interactive whiteboard system are included in the ECP box. Don't use the installation instructions included in your SMART Board interactive whiteboard box when installing the SMART Board X885i4 interactive whiteboard system. Additional documentation is available from smarttech.com/support.

Projector connections

Connector	Connect to:
Power	Power supply
4-pin power mini-DIN 5V/2A output	ECP harness cable
7-pin mini-DIN	ECP harness cable
RS-232F (DB9)	ECP harness cable
DB15F RGB video input (VGA 1)	Primary computer (not included)
DB15F RGB video input (VGA 2)	Secondary computer (not included)
3.5 mm stereo audio-input (×2)	Stereo Y cable
DB15F RGB video output (VGA Out)	Secondary display (not included)
3.5 mm stereo audio-output	Speakers (not included)
RCA composite video input (and left and right RCA audio input)	Video source (not included) through RCA connector pod
4-pin mini-DIN S-video input (and left and right RCA audio input)	Video source (not included)
RJ45 network	Network (for SNMP access)
USB B	Computer (for service access)

Projector fan operating temperatures

- Standard speed – 0' to 6000' (0 m to 1800 m): 41°F to 95°F (5°C to 35°C)
- High speed – 6000' to 6800' (1800 m to 2100 m): 41°F to 86°F (5°C to 30°C)

Projector noise 36 dBA (high fan speed) or 31 dBA (standard fan speed), measured using the JIS method

Power requirements

100V AC to 240V AC, at 50 Hz to 60 Hz

SPECIFICATIONS

SMART Board interactive whiteboard system – Model SBX885i4

Power cable	Includes a 14' 9" (4.5 m) power cable
External control	4-pin connector on ECP for RS-232 protocol room control systems. The cable is available separately from your authorized SMART reseller (smarttech.com/wheretobuy).
Alert broadcast feature	Enables administrators to send notification messages to network-connected SMART UF65w projector systems for immediate on-screen display.
Remote control	Provides an alternative method of controlling SMART UF65w projector settings
Theft protection	<p>The SMART UF65w projector system features an optional padlocked ring to prevent theft.</p> <p>There are no projector menu options on the ECP. Keep your remote control in a safe place because the ECP is not a substitute for the remote control.</p> <p>A Kensington® security lock slot is provided to secure the system to a wall as a visual and physical theft deterrent.</p>

ECP features

Input/output connections

Connector	Connect to:
RJ11 6-wire	Pen tray
USB B	Pen tray
11-pin	ECP harness cable
4-pin	Room control
Mini USB B	Primary computer (not included) using the provided cable
Mini USB B	Secondary computer (not included)
USB A	USB drive (not included)

NOTE

RCA jacks for audio and composite video inputs are available on the separate RCA connector pod, which is included in the ECP box.

Volume control	Controls sound range
Power button	Turns the interactive whiteboard and projector on and off

SPECIFICATIONS

SMART Board interactive whiteboard system – Model SBX885i4

Input selection button Select the projector video and audio inputs from the available sources:

- VGA 1 (primary computer)
- VGA 2 (secondary computer)
- Composite
- S-video

Storage and operating specifications

Storage

- Maximum storage temperature: 122°F (50°C)
- Minimum storage temperature: -40°F (-40°C)

Operation

- Using standard fan speed, 41°F to 95°F (5°C to 35°C) from 0' to 6000' (0 m to 1800 m)
- Using high fan speed, 41°F to 86°F (5°C to 30°C) from 6000' to 6800' (1800 m to 2100 m)
- In Service mode, 41°F to 86°F (5°C to 30°C) from 6800' to 9800' (2100 m to 3000 m)

SMART order numbers

SBX885i4 87 1/8" (221.3 cm) diagonal SMART Board X885 interactive whiteboard with a SMART UF65w projector system

20-01032-20 Replacement projector lamp

